



## 100% ELECTRIC SKID STEER

### KEY SPECIFICATIONS

- Battery Powered: 300Ah - 5hr / 525Ah - 8hr
- Charge Time: 8hr Standard / 4hr Fast Charge
- Continuous Power: 40.5kW
- Height to Hinge Pin: 144 7/8" / 3680mm
- Hydraulic Flow Rate: 16 GPM / 72 l/min
- Overall Machine Width: 66 1/2" (1688mm)  
70 1/2" (1788mm)
- Operating Weight: 300Ah - 8150lbs (3700kg)  
525Ah - 8750lbs (3975kg)
- HYD OR Electric Attachments
- Up & Over Cabin Door
- Telematics Option
- 3 Power Modes



### KEY FEATURES

The 100% battery powered EXVO EXR significantly lowers operating costs and carbon emissions, aiding access to low-carbon projects. The new Up and Over door allows easy access to the cabin while increasing visibility and enhancing operator comfort.

With ZERO exhaust emissions, the EXVO EXR enables silent operation on the jobsite, reducing noise pollution, and allowing the ability to work night shifts with little to no disturbance to residents.



**PATENT PENDING**

United Kingdom Application No 2312690.7





### 100% ELECTRIC SKID STEER

#### STANDARD FEATURES



- Front & Rear Work Lights
- Horn & Reversing Buzzer
- ISO Joysticks / H Pattern
- Mesh Cabin Sides
- Front Auxiliary Hydraulics
- X3 Power Modes
- Cruise Control
- Traction Speed Limit Settings
- Cabin Cleanout Plate
- Fully Adjustable Armrests
- Cabin USB Connection
- X4 Lift Points/ Tie Down Points
- Removable Battery

#### OPTIONAL FEATURES

- Fully Enclosed Cabin  
c/w Up & Over Door
- Cabin Heater
- Air Conditioning
- Road Light Kit
- Reversing Camera
- Front Auxiliary Electric Connection
- Electric Quick Attach Headstock  
(X-TACH)
- Self-Levelling Boom
- Boom Suspension
- Return to Dig Function
- Bucket Shake Function
- Telematics Kit
- Flashing Beacon
- Bluetooth Radio
- Operator Keypad Access
- On-Board Charger



SCAN TO VISIT OUR  
WEBSITE

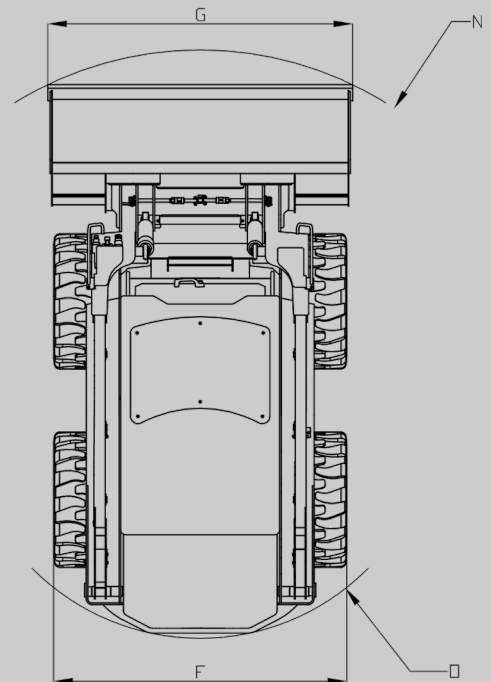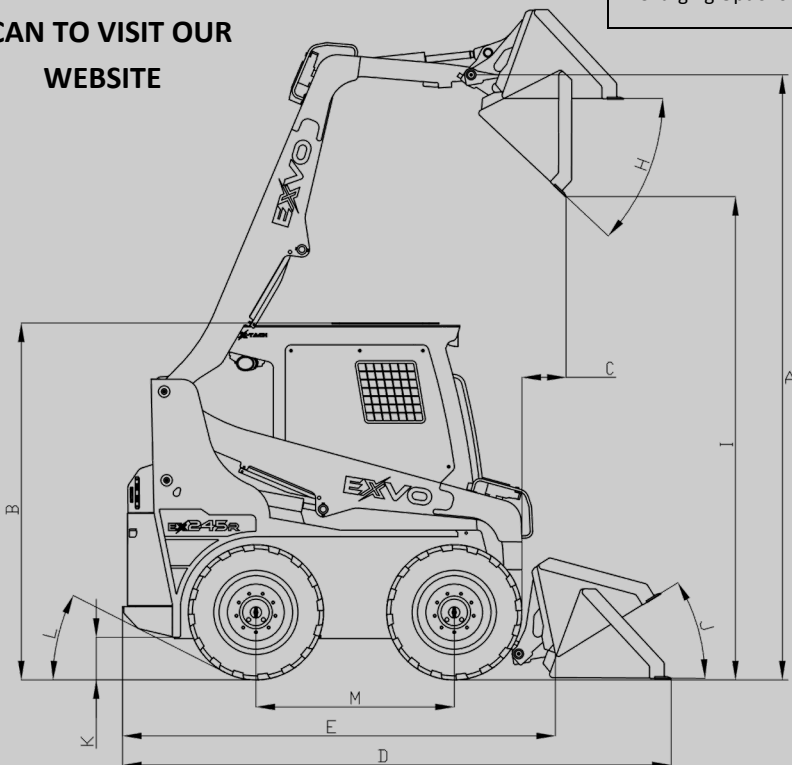

	IMPERIAL	METRIC	IMPERIAL	METRIC
Operating Capacity (ROC)	1870lbs	850kg	2750lbs	1250kg
Tipping Capacity	3740lbs	1700kg	5500lbs	2500kg
Operating Weight	8150lbs	3700kg	8750lbs	3975kg
A. Height to Hinge Pin	144 7/8"	3680mm	144 7/8"	3680mm
B. Overall Height to Top of ROPS	86 1/4"	2190mm	86 1/4"	2190mm
C. Dump Reach at Full Height	10 3/4"	273mm	10 3/4"	273mm
D. Overall Length with Bucket	125"	3175mm	132"	3350mm
E. Overall Length without Bucket	97"	2465mm	104"	2640mm
F. Overall Width without Bucket	66 1/2"	1688mm	70 1/2"	1788mm
G. Overall Width with Bucket	68 1/4"	1735mm	72 1/4"	1835mm
H. Dump Angle at Full Height	42.7°	42.7°	42.7°	42.7°
I. Dump Height	116"	2945mm	116"	2945mm
J. Rollback Angle at Ground Level	32°	32°	32°	32°
K. Ground Clearance	10 1/4"	260mm	10 1/4"	260mm
L. Departure Angle	34°	34°	27°	27°
M. Wheelbase	47 1/2"	1210mm	47 1/2"	1210mm
N. Clearance Circle - Front Bucket	84 1/2"	2147mm	84 1/2"	2147mm
O. Clearance Circle - Rear	55 1/2"	1410mm	57"	1450mm
Hydraulic Flow Rate	16GPM	72 L/min	16GPM	72 L/min
Tyres	10x16.5 HD	10x16.5 HD	12x16.5 HD	12x16.5 HD
Nominal Power	40.5kW	40.5kW	40.5kW	40.5kW
Maximum Power	120kW	120kW	120kW	120kW
Battery Capacity - Run Time	300Ah—5hr run time		525Ah—8hr run time	
Charging Options	3Ph 4 Hr Charger 1Ph/3Ph 8 Hr Charger		3Ph 4 Hr Charger 1Ph/3Ph 8 Hr Charger	

EXVO HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.